




## «THE GRID TANGENT»

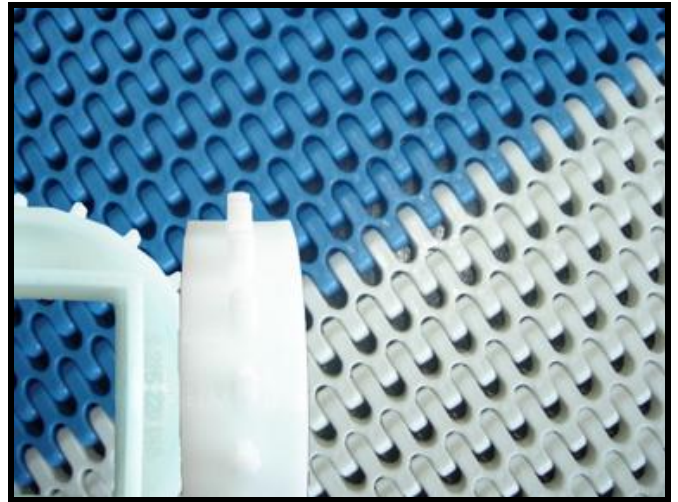

The Grid conveyor belt of the series **ALPHAbelt S2115** is for **straight motion**, with pitch 12,7 mm.

The Grid belt of the series 2115 can function **without rotating shaft**, by installing a wear strip with thickness 6 mm. (min) or a roller with diameter 6 mm. (min).

By this way, **you can reduce in the minimum the distance between two conveyors**, cancelling the bridges and the rest transferring accessories.

Assembling Grid plastic segments to each other, we can create belts with **width from 20 to 2.000 mm**, and unlimited length.

It is design to convey **small in their weight and volume loads**.

It is produced with **materials suitable for contact with food**.

It can function in environment with temperature **from -40 up to +100°C**.

The motion transmission is succeeded with the **plastic sprockets S2115**.

### SERIES CONTENTS

**GRID** page 10

**SPROCKETS** page 11

**SPROCKETS TABLE** page 12

**INSTALLATION-MAINTENANCE INSTRUCTIONS** page 13 & 14

**ORDER FORM** page 15

