




S3125

«CURVE 26»

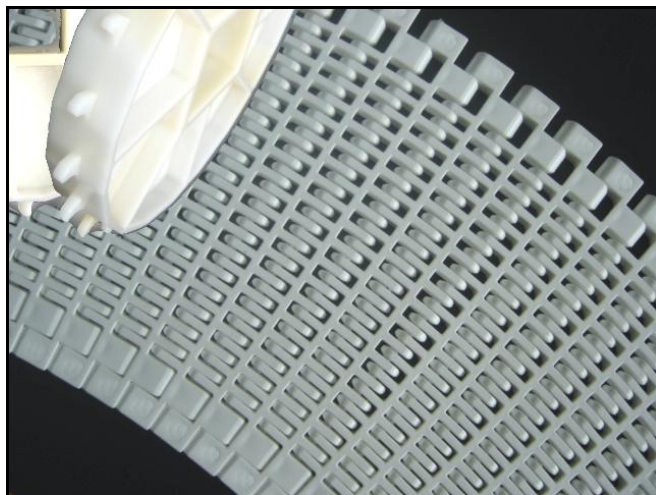

When the production procedures demands a **helical conveyo or a conveyor with one or more curves** and the conveyed product has small volume, so the belt need to have small openings, then the curved belt series **ALPHAbelt 3125**, with pitch 26 mm. and openings 5,7 X 5,7 mm. is the most reliable solution.

It is produced by **assembling grid plastic segments**, connected to each other with a plastic rod $\Phi 5,2$ mm.

By this way you can create belts with **width from 40 to 3.000 mm**, and unlimited length.

It is produced with materials **suitable for contact with food**.

It is designed to convey middle and small in **weight and volume loads**.

It functions in ambient temperature condition from **-60 up to +130°C**, depending on the material they are produced of.

The motion transmission is made by the **plastic sprockets series 3125**.

The belts **ALPHAbelt 3125** help in the **increase of the production time**, in the drastic reduce of the function cost, as well as in the cost of the maintenance of the equipments of the products conveyance.

SERIES CONTENTS

GRID BELT page 81

SPROCKETS page 82

SPROCKETS TABLE page 83

INSTALLATION-MAINTENANCE INSTRUCTIONS page 84 & 85

ORDER FORM page 86

